

12.620

MOUNTING INSTRUCTIONS

Thank you for selecting our superior quality Garelick EEz-In Brand Boarding Ladder. Your ladder was designed and manufactured using the finest material available to provide long product life. Choosing the proper size ladder for location and correct fit is important to assure safe, convenient, and reliable use.

Although mounting hardware is not provided due to the wide variety of applications and diversity of boat shapes and sizes mounting holes have been provided and it is recommended to use at a minimum 1/4" diameter fasteners. These fasteners should be through bolted with a backing plate.

SAFETY GUIDELINES

- No jumping or diving!
- Do not use when motor is running
- This ladder designed for boat use only
- Face ladder when entering boat or water
- Only one person on ladder at a time
- Check all steps and hardware before using
- Never operate your boat with the ladder in "down" position. Serious injury, or damage to your boat or ladder may result.
 - When underway, fold ladder up and secure using the Velcro strap provided.

MAINTENANCE

• Safety tip


Periodically check mounting hardware and retighten (due to normal boat operation.)

• Keep that bright finish!


Local weather conditions may contribute to minor corrosion. Stainless, like other metals, is not completely free from corrosion attack. Regular fresh water rinsing and periodic cleaning with a mild abrasive cleaner will help to retain luster.

GENERAL ASSEMBLY INSTRUCTIONS:

Step 1: Assemble the (2) U-channels to the (2) top verticals by using (4) 1/4-20 x 1 5/8" machine screws with (4) 1/4-20 locknuts.

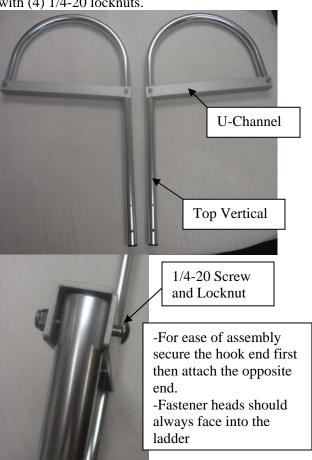


Step 2: Insert (6) black caps into the end of the top vertical as well as into the ends of the bottom verticals.

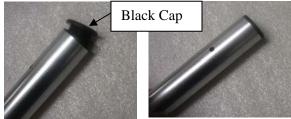




12.620

Step 3: Assemble (1) black step to the top verticals using (2) #10 screws (Note: tighten all screws flush to step - screws shown out for clarity).

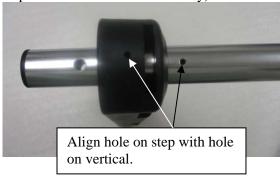


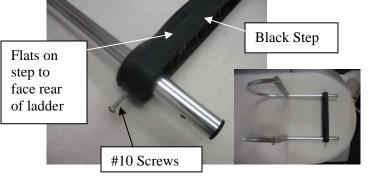

Step 4: Assemble (2) black steps to the bottom verticals using (4) #10 screws (Note: tighten all screws flush to step - screws shown out for clarity).



Step 5: Join the top vertical section to the bottom vertical section using the hardware shown below.

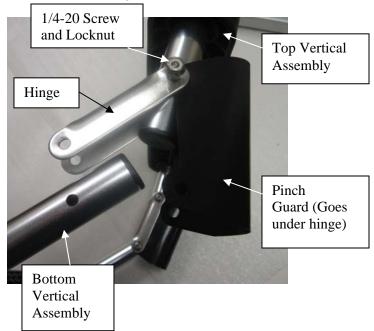





12.620

Step 6: Attach the standoffs to one of the black steps. Choose the step that best suits your application and aligns with the pontoon accordingly to provide the most support.

Step 6A: Punch holes into the black step by using the 1/4-20 screw provided in the hardware bag. Align the screw with the hole on the bottom of the black step and strike with a hammer to pierce a hole as shown.



Step 6B: Using the hole that was punched in step 6A assemble the standoff to the step as shown.



Step 7: Attach the Velcro strap to one of the top verticals to secure the bottom vertical section in the up position when not in use.



Insert the strap through itself into a loop as shown.

Write for A complete EEz-In Catalog GARELICK 644 2ND Street, PO Box 8 St. Paul Park, Minnesota 55071



Pull strap tight and wrap it around opposite tube to secure ladder assembly together in the up position.

Step 8: Product is now ready to be installed onto the boat and ready to be used. Ensure all fasteners are secure and tight.

PARTS LIST			
Part Number	Bagged Parts	Description	QTY
08.878		MTG BRKT, U CHANNEL	2
49.782		STANDOFF HARDWARE BAG	1
		1/4-20 X 1 1/2 MACHINE	
	03.079	SCREW	2
	03.221	1/4-20 LOCKNUT	2
	10.001	WHITE TIP	2
	50.012	STANDOFF	1
60.753		TOP VERTICAL	2
60.754		BOTTOM VERTICAL	2
60.755		BLACK STEP	3
60.758		HDW BAG 12360	1
	03.103	#10 X 2 SCREW	6
	03.221	1/4-20 LOCKNUT	8
		1/4-20 X 1 5/8" MACHINE	
	03.842	SCREW	8
	06.1660	PINCH GUARD	2
	06.184	FLAT BLACK PLUG	6
	49.205	STRAP, VELCRO	1
	50.124	HINGE	2

Phone: 651-459-9795 E-mail: mail@garelick.com Website: www.garelick.com 04/10



12.620



