

CDI P/N: 114-7509K1

NOTE: This unit replaces all 8227795A2, A5, A10, A12, A13 AND A14 series CDM Modules

This product is designed for installation by a professional marine mechanic. CDI cannot be held liable for injury or damage resulting from improper installation, abuse, neglect or misuse of this product.

INSTALLATION

1. Disconnect and clean all engine and battery ground wires.
2. Disconnect the old CDM Module and remove the high tension coil wires from the spark plugs.
3. Unbolt and remove the old CDM Module. (Note the direction of the spark plug wire).
4. Check for DC voltage on the kill (stop) wires (usually Black/Yellow) with the key-switch in the on and off position. At no time should you see over 2 volts DC on this wire as severe damage to the power pack can occur.
5. Apply a light amount of dielectric grease (i.e. CDI 991-9705) to the seal area of the jumper wire cable.
6. Connect the jumper wire cable supplied to the wire connector from the engine harness. Bolt the new Adapter Plate onto the engine, using the new bolts supplied.
7. Apply a light amount of dielectric grease to the outside of the new spark plug wire and thread the spark plug wire into the new CDM Module.
8. Bolt the new CDM Module onto the Adapter Plate (Orient the new CDM Module so that the spark plug wire is pointed in the same direction as the original).
9. Connect the jumper wire cable supplied to the new CDM Module and connect the spark plug wire to the spark plug.

TROUBLESHOOTING THE 114-7509

NO SPARK:

SERVICE NOTE: A 511-5207A 1 CDM Test Harness is highly recommended for testing these parts.

1. Disconnect the black/yellow kill wires from the harness and retest. If the engine's ignition fires now, the kill circuit has a fault-possibly the key switch, harness or shift switch.
2. Install a 511-5207A 1 test harness inline to one of the CDM Modules and unplug the Black/Yellow wires in the harness. This will isolate that CDM from all other connections. If spark returns on that CDM with the Black/Yellow wires unplugged, test the remaining CDMs. If you disconnect one CDM and all other CDMs start firing, the one the test harness is connected to is defective. Remember, the fault could be in the CDM harness.
3. Disconnect one CDM module at a time and see if the other modules start firing. If they do, the module you just unplugged is defective.
4. Disconnect the yellow wires from the stator to the rectifier and retest. If the engine fires, replace the rectifier.
5. Check the cranking RPM. A cranking speed less than 250-RPM will not allow the system to fire properly.
6. Check the stator resistance and DVA output as given below:

WIRE	Read To	OEM RESISTANCE	DVA
White/Green	Green/White	500-700	180V or more

6. Check the resistance of the CDM as follows:

	Red Meter Lead	Black Meter Lead	Reading
CDM Pin #	A	C	CDI 2200-2400 Ohms – OEM 1200-1300 ohms
CDM Pin #	D	A	DIODE*
CDM Pin #	A	D	DIODE*
CDM Pin #	D	B	DIODE*
CDM Pin #	B	D	DIODE*
CDM Pin #	A	B	DIODE*
	High Tension Lead	A	OEM 700-1300 Ohms – CDI 2200-2400 Ohms

* Diode readings are to be read one way, then reverse the leads and read again. You should get a low reading in one direction and a higher reading in the other.

INTERMITTANT SPARK OR NO SPARK ON ONE OR MORE CYLINDERS:


If the cylinders are only acting up above an idle, connect an inductive Tachometer to all cylinders and try to isolate the problem cylinders.

As these triggers have the Bias circuit built into them, you cannot meter them. Using a set of piercing probes, check the trigger DVA output as given below:

2 CYLINDER

Check From	Check to	Resistance	DVA Reading
Purple wire	Engine GND	Open	0.5V or more
White wire	Engine GND	Open	0.5V or more

If # 1 is not firing, disconnect #2 CDM module. Check which stator wire feed #2 CDM and using a jumper wire, short that side of the stator to engine ground. If # 1 starts firing, replace the #2 CDM. For #2 CDM not firing, short the stator wire that feeds the #1 CDM. Again, if the #2 CDM starts firing, replace the #1 CDM.

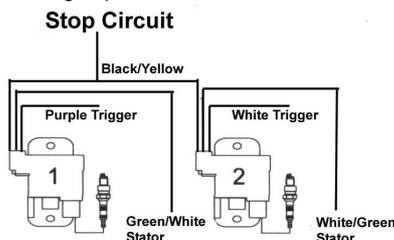

CDI Electronics • 353 James Record Road SW • Huntsville, AL 35824


Web Support: www.cdielectronics.com • Tech Support: 1-866-423-4832 • Order Parts: 1-800-467-3371

All rights reserved. Reproduction or use of content, in any manner, without express written permission by CDI Electronics, Inc., is prohibited.

3 CYLINDER

Check From	Check to	Resistance	DVA Reading
Purple wire	Engine GND	Open	0.5V or more
White wire	Engine GND	Open	0.5V or more
Brown wire	Engine GND	Open	0.5V or more

For example, if #1 CDM is not firing: If #1 is not firing, disconnect #2 CDM module and see if the #1 module starts firing. If it does, the #2 module is likely bad. If still no fire on #1 CDM, reconnect #2 CDM and disconnect #3 CDM module and see if the #1 module starts firing. If it does, the #3 module is likely bad. If no change at this point, swap the #3 and #1 CDM modules. If the problem moves to another cylinder, replace the CDM that was on #1 cylinder. If no change, swap the Green/White and White/Green wires. If fire changes, replace the stator. When moving CDM modules around on the engine, pay attention to the stator wire colors going to the CDMs. You must have a Green/White and White/Green wire connected or you will lose fire on all CDMs. Follow these guidelines for whichever CDM is not firing.

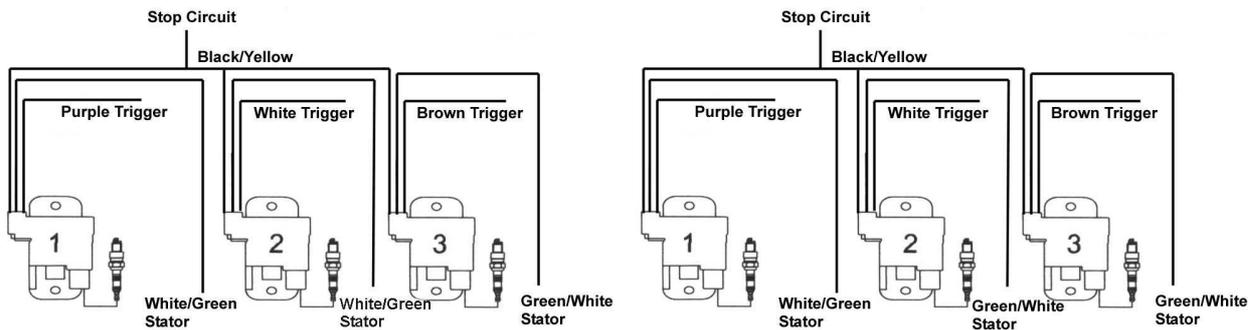


4 CYLINDER

Check From	Check to	Resistance	DVA Reading
Brown wire	Engine GND	Open	0.5V or more
White wire	Engine GND	Open	0.5V or more
Purple wire	Engine GND	Open	0.5V or more
Blue wire	Engine GND	Open	0.5V or more

When moving CDM modules around on the engine, pay attention to the stator wire colors going to the CDMs. You must have a Green/White and White/Green wire connected or you will lose fire on all CDMs. Whichever CDM is not firing, disconnect it and one of the other CDMs on the opposite side of the stator. Try to get two CDMs firing and swap connections on each side to isolate the problem CDM. Remember, a CDM on one side of the stator wire can stop the other CDMs on the opposite side of the stator.


For example, if #1 is not firing, disconnect #2 CDM module and see if the #1 module starts firing. If it does, the #2 module is likely bad. If still no fire on #1 CDM, reconnect #2 CDM and disconnect #3 CDM module and see if the #1 module starts firing. If it does, the #3 module is likely bad. If no change at this point, swap the #3 and #1 CDM modules. If the problem moves to another cylinder, replace the CDM that was on #1 cylinder. If no change, swap the Green/White and White/Green wires. If fire changes, replace the stator.

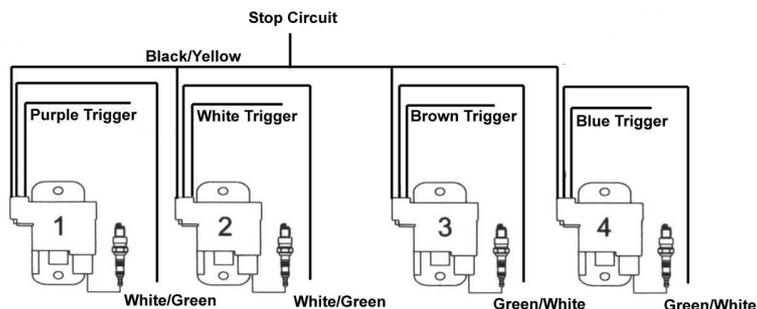

6 CYLINDER

Check From	Check to	OEM Resistance	CDI Resistance	DVA Reading
Purple wire	Blue	1100-1400	800-1050	0.5V or more
White wire	Red	1100-1400	800-1050	0.5V or more
Brown wire	Yellow	1100-1400	800-1050	0.5V or more

The connection guide below will assist you in locating areas where problems can occur. Remember a short in either #1, #2 or #3 can cause either # 4, #5 and #6 not to have spark.

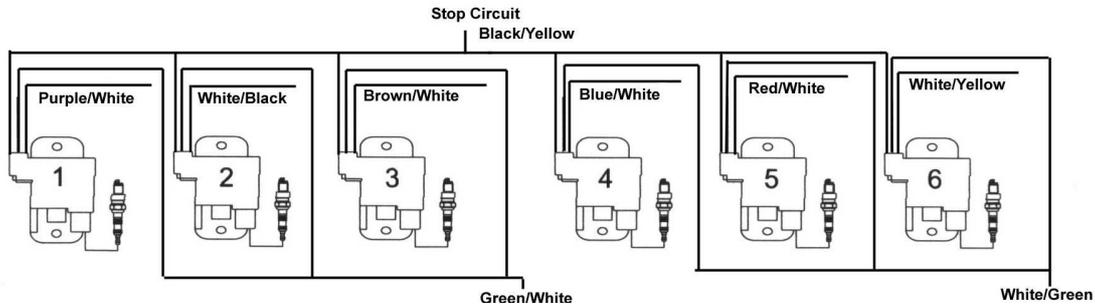

HIGH SPEED MISS:

1. Connect an inductive Tachometer to all cylinders and try to isolate the problem. A high variance in RPM on one cylinder indicates a problem usually in the trigger or CDM module.
2. Perform a high-speed shutdown and read the spark plugs. Check for water. A crack in the block can cause a high speed miss when the water pressure gets high, but a normal shutdown will mask the problem.
3. Remove the flywheel and check the triggering and charge coil flywheel magnets for cracks or broken magnets.
4. Disconnect the yellow wires from the stator to the rectifier and retest. If the engine fires, replace the rectifier.
5. Rotate the stator one bolt hole in either direction and re-test. If the miss is gone, leave the engine as is if you applied a thread locker to the stator screws.