

WISE PRO ANGLER SERIES



MOUNTING INSTRUCTIONS

Caution: Before installing, please be aware of any potential obstructions beneath deck structure including wires, hoses, and fuel tanks. If you have any questions consult your local marine dealer.

DRIVER AND PASSENGER BUCKETS


1. Unpack and position new driver, passenger, and center fold down seats in boat for desired layout. Mark outside of each back where the seat profile meets the boat deck with tape.
2. On the driver and passenger backs, carefully remove the center insert (velcro mounted), starting from the bottom and working towards the top.
3. Using tape marks, position seat backs and screw through plywood directly into the deck using a minimum of (3) #10 x 1.5" stainless steel screws (not provided).

Note: For aluminum decking, a pilot hole or self tapping screw may be required


4. Mount seat hinge to deck. Check clearance to be sure seat can be fully raised. Depending on boat style, hinge may need to be relocated on seat bottom.

CENTER FOLD DOWN SEAT

1. Position in center location, marking deck where rear of seat is located.
2. Hold seat vertically and mount with #10 stainless steel sheet metal screws.

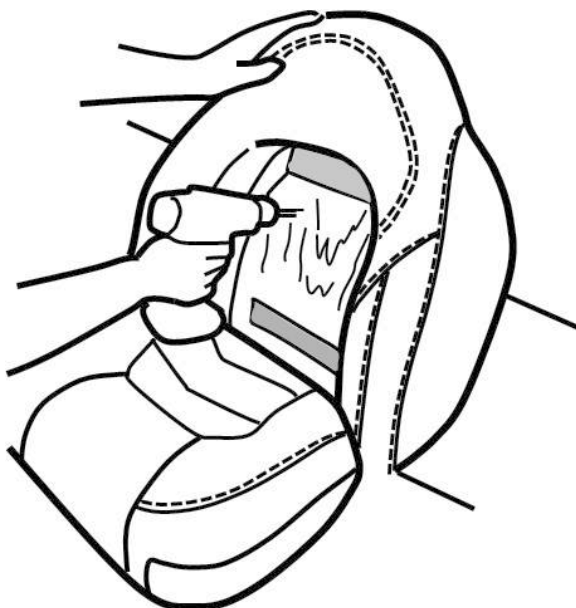

DRIVER / PASSENGER BACK

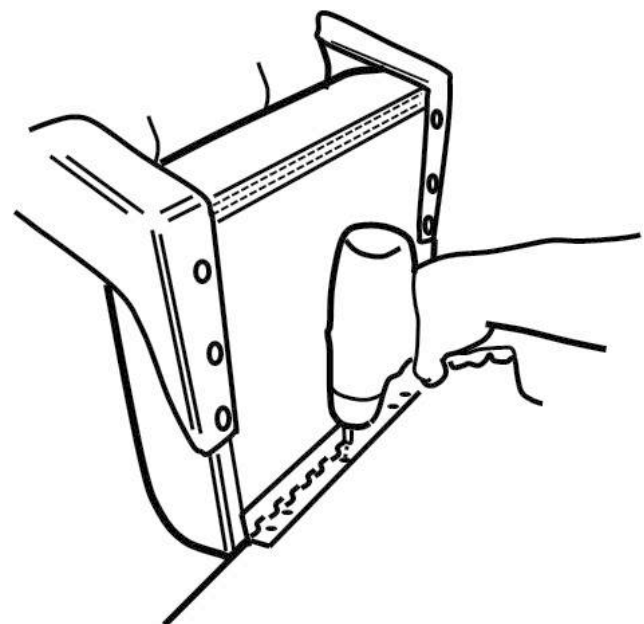

HINGE MOUNT