INSTALLATION INSTRUCTIONS

T10068 Portable Washdown Pump Kit



GENERAL SAFETY & USAGE INFORMATION

- Do NOT spray nozzle at people or animals or hot engines as this could cause harm or damage.
- Do NOT place the kit in high temperature area for extended period of time.
- Do NOT submerse the pump in water.
- Do NOT use in hazardous areas.
- The portable washdown pump kit has an internal protection circuit and may shut down if continuous spraying of water exceeds 30 minutes.
- After using the pump each time, disconnect the water inlet and outlet hoses.

SPECIFICATIONS

- Pressure: 100 PSI Maximum
- Voltage: 12V DC
- Power: 170W
- Maximum Inlet Water Temperature: 104°F / 40°C

APPLICATIONS

The TRAC[®] Portable Washdown Kit can be used to clean boats and boat decks, fish cleaning stations, docks and RVs. It is easy to use for many cleaning or watering needs. The adjustable nozzle offers many applications:

- Spray mist or sprinkler to water plants and grass. The spray height can reach over 13 ft (4m).
- Spray jet to clean cars or RVs. It can be used to clean concrete, decks, even exterior walls and windows of homes. The spray height can reach nearly 20 ft (6m).
- The inlet water hose with filter can also be used to drain fish tanks or hot tubs.
- The garden hose adaptor can be used to connect the inlet hose to a spigot.

STANDARD ACCESSORIES

- One outlet hose, 19.7 ft (6m) with quick-connect fitting.
- One adjustable spray nozzle with a plastic handle and brass spray nozzle.
- One inlet hose, 6.6 ft (2m), with a filter and garden hose adaptor.
- Battery Clip adaptor to connect to battery posts if 12v power port is not available.


OPERATION INSTRUCTIONS

Remove the contents from the shipping carton and take out the portable washdown kit to determine that all pieces are included and undamaged. Read these instructions, then connect the water hoses and use it safely.

- Connect the inlet hose (BLUE hose with filter on one end) to the inlet quick-connect fitting on pump housing. NOTE: quick-connectors can be pressed together to connect. To release, slide the outer collar back and disconnect.
- 2. Connect the outlet hose (BLACK hose) to the quick-connect fitting.
- 3. Connect the power plug to any cigarette lighter style power port or use the battery clip adaptor to connect directly to battery posts (red clip to battery positive and black clip to battery negative).
- 4. Turn power switch ON. NOTE: The pump does not run until the spray nozzle is pressed to spray water. This is an ON-DEMAND pump. Meaning the pump only runs when water is being sprayed.
- 5. Adjust the shape of the spray nozzle to achieve the desired spray pattern.
- 6. When finished spraying, disconnect both water hoses, coil and store in housing. Secure coils with included Velcro straps.
- 7. Clean filter at end of inlet hose as needed. A second filter is located on side of pump housing inside the hose compartment. To access the pump filter, remove the side panel to the hose compartment by lifting it to release the hooks at the top corners. Tilt panel out and remove. A metal wrench is included to remove clear filter cover by turning the clear cover counter-clockwise. Carefully remove filter and clean with soft brush. Reassemble.
- 8. To use the garden hose fitting, remove the inlet filter from inlet hose. Insert garden hose fitting. Attach to spigot.



INSTALLATION INSTRUCTIONS

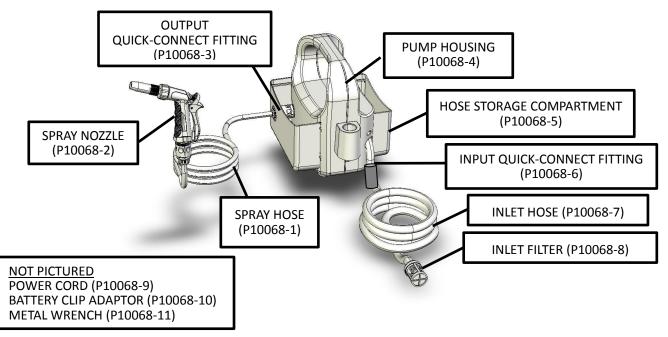

TROUBLESHOOTING GUIDE

Symptom	Possible Causes	Corrective Action
The machine doesn't work.	Poor electrical connection or no power present.	Check power connection, check for voltage at power source. Check fuse.
	Cigarette lighter plug is damaged.	Replace the fuse in plug. Replace plug if damaged.
	The motor is over heated.	Cool for 5 minutes then restart to use.
No water from the spray gun or pressure has become reduced.	The hole of the spray nozzle is blocked.	Remove the nozzle and clean it.
	The filter is blocked.	Clean the filter.
Quick-connects are leaking.	The connection is not pressed together completely.	Disconnect and reconnect with moderate force.
	The seal ring is aging.	Replace the seal ring.

TRAC Limited Warranty

This limited warranty is provided by TRAC Outdoor Products Co (TRAC) to the original consumer purchaser (purchaser) of this TRAC product. This limited warranty is not transferable to any other party. TRAC will at its option repair or replace any part(s) of the TRAC product which may be found by TRAC to be defective within three (3) years of purchase. TRAC will pay the shipping charge to the purchaser for any part(s) which may be shipped by TRAC. For warranty repair or replacement, the purchaser must provide dated proof of purchase and notify TRAC of the request for warranty service. The purchaser will notify TRAC by email at info@TRAC-Outdoor.com or by phone at 615-462-6224 for warranty service. TRAC will attempt to provide parts needed. If the product is to be returned, purchaser will be provided a Return Goods Authorization (RGA) number to include with any return for warranty service which will be shipped at the purchaser's expense to TRAC Warranty Dept., 251A Mayfield Drive Smyrna, TN 37167. The purchaser must use reasonable care in maintenance and operation of the product in accordance with this manual. Failure to follow the instructions in the manual will void the warranty. This warranty covers defects in material or workmanship of the TRAC product. This warranty does not cover failure that results from misuse, improper installation, accident, abuse, neglect, modification, or improper maintenance. This pump is intended for removal of spray, rain water, and normal accumulation of water due to seepage and spillage on a seaworthy watercraft. There is no other express warranty. Implied warranties, including those of merchantability and fitness for a particular purpose, are limited to three (3) years from the date of purchase. Costs of installation or repair by service centers or marine repair facilities are not covered by this warranty. This is the exclusive remedy and any liability for any and all incidental or consequential damages or expenses whatsoever is excluded. Some states do not allow limitations on how long an implied warranty lasts, or do not allow exclusion or limitation of incidental or consequential damages, the above limitations may not apply to you. This limited warranty gives you specific legal rights, and you may also have other rights which vary from state to state.